

BrecciaSphere Lite: Biopolymer “liquid stone” poured floor with a natural mineral effect surface through pixellation with recycled plastic bottle shred.

APPLICATION TIME: 5 DAYS

Installation varies with size and detailing

GUARANTEE: 6 YEARS

Non crack, non-fade, comfort flooring

THICKNESS: 4 MM

Typical finished thickness of 4mm

ELASTIC AND DURABLE

- Exceptional sound-damping qualities
- Stylish liquid stone effect in most colours
- Suitable over many subfloor types
 - 100% UV stable
- Exceptional durability and comfort
 - Solid and motion variants
 - Almost any colour possible


TYPICAL DATA

Layers	4 (typical)
Elasticity	160%
Shore Hardness	D55
Abrasion Resistance	Very Good
Fire Classification	B _{fl} -s1 - EN 13501-1

Area Use Classification	23/34/42 - EN685
Impact Sound Reduction	2 - 16dB
Slip Rating	R9/R10/R11 EN 51130
Resistance to Chair Castors	Good - EN 425
FeRFA Type	Type 5 - BS 8204



BrecciaSphere Lite Typical Section

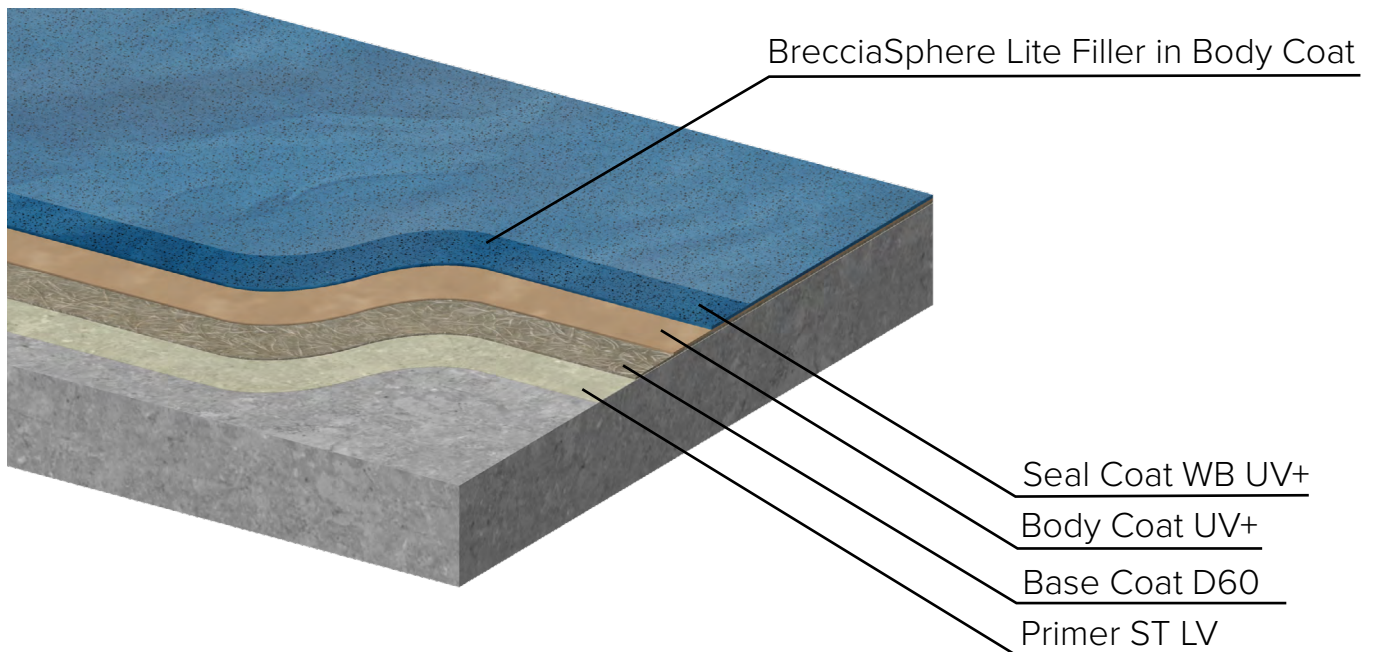

Typical System Build Up BrecciaSphere Lite

• Primer	- Primer ST/LV/Rapid	- 1 x 0.65kg/m ²
• Base Coat	- Basecoat D60	- 1kg/m ²
• Body Coat	- Body Coat UV+	- 3kg/m ²
• BrecciaSphere Lite Shred	- BrecciaSphere Lite Shred Filler	- 0.06kg/m ²
• Seal Coats	- Seal Coat WB UV+ Clear	- 2 x 0.08kg/m ²

Other primer options and seal coats variations are possible