

**DesignSphere:** A truly unique option, the Sphere8 DesignSphere floor can incorporate any design - using innovative systems to include any chosen image into a Sphere8 floor build-up that is creative yet practical.

APPLICATION TIME: 5-6 DAYS

Installation time varies with size

GUARANTEE: 5 YEARS

With a typical lifespan of over 20 years

THICKNESS: 3-6 MM

Poured in layers to a thickness of 5mm (typical)

CREATE SOMETHING UNIQUE

- A seamless canvas for any design
- Suitable in commercial and residential spaces
- Can be re-sealed to refresh the surface
- Incorporate your digital design
- Almost any colour possible


TYPICAL DATA

Layers	7
Elasticity	60%
Shore Hardness	D70
Abrasion Resistance	Good
Fire Classification	B <sub>1</sub> s1 - EN 13501-1

Area Use Classification	23/33 - EN685
Impact Sound Reduction	2dB+
Slip Rating	R9/R10/R11 - EN 51130
Resistance to Chair Castors	Good - EN 425
FeRFA Type	Type 5 - BS 8204



## DesignSphere Typical Section

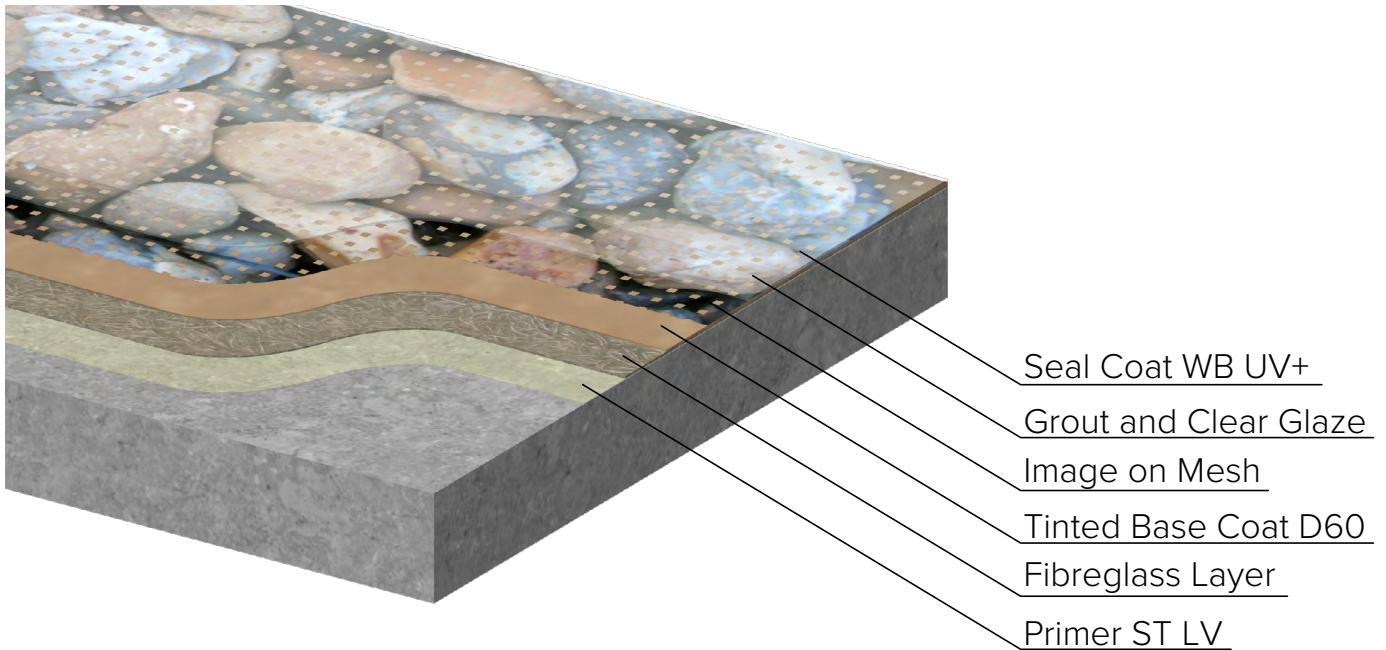

- Seal Coat WB UV+
- Grout and Clear Glaze
- Image on Mesh
- Tinted Base Coat D60
- Fibreglass Layer
- Primer ST LV

## Typical System Build Up DesignSphere

• <b>Primer</b>	- Primer ST/LV/Rapid	- 1 x 0.3kg/m <sup>2</sup>
• <b>Reinforced Base Coat Fibreglass Embedment</b>	- Primer STLV/ST/Rapid - 225gsm chop strand matting	- 1 x 1.0kg/m <sup>2</sup> - 1m <sup>2</sup> /m <sup>2</sup>
• <b>Base Coat</b>	- Tinted Basecoat D60	- 1.5kg/m <sup>2</sup>
• <b>Image on Mesh</b>	- Image on Mesh	- 1m <sup>2</sup> /m <sup>2</sup>
• <b>Grout and Clear Glaze</b>	- Grout and Clear Glaze	- 1 x 0.5kg/m <sup>2</sup> - 2 x 1kg/m <sup>2</sup>
• <b>Seal Coats</b>	- Seal Coat WB UV+ Clear	- 2 x 0.08kg/m <sup>2</sup>

Other primer options and seal coats variations are possible