

EconoSphere: EconoSphere offers an entry-level flooring option in commercial and residential environments. Similar to other Sphere8 systems with some practical and logistical benefits. Various aesthetic finishes are possible.

APPLICATION TIME: 3+ DAYS

Fewer layers reduce the required application time

GUARANTEE: 2 YEARS

THICKNESS: 2-3 MM (typical)

A different build-up minimises the thickness

PERFECT FOR ECONOMY BUDGETS

- Ideal for projects with cost limitations
- A time and cost-effective commercial floor
- Seamless, versatile, stylish finish
- Various finishes are possible


TYPICAL DATA

Layers	3+
Elasticity (typical - varies)	120%
Shore Hardness (typical)	D60
Abrasion Resistance	Good
Fire Classification	B _{fl} s1 - EN 13501-1

Area Use Classification	23/33 - EN685
Impact Sound Reduction	4dB +
Slip Rating	R9/R10/R11 - EN 51130
Resistance to Chair Castors	Good - EN 425
FeRFA Type	Type 5 - BS 8204



EconoSphere Typical Section

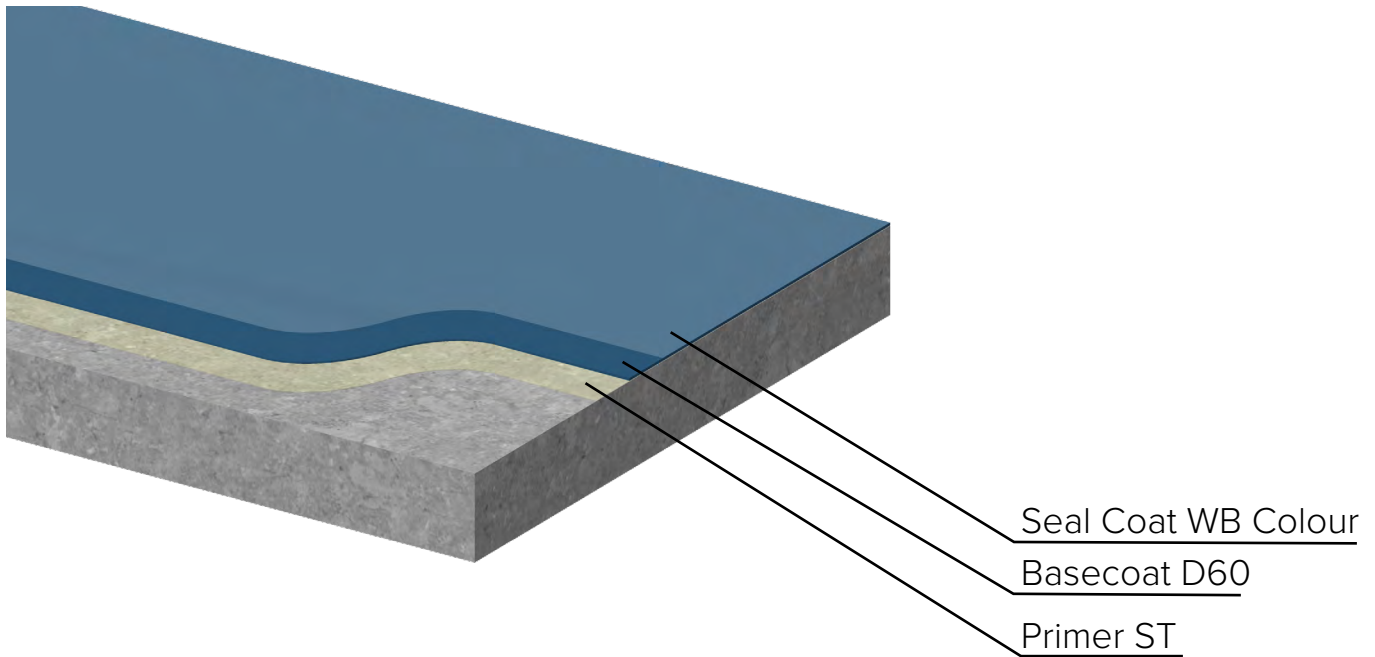

Typical System Build Up EconoSphere

• Primer	- Primer ST	- 0.50kg/m ²
• Base Coat	- Basecoat D60	- 2.50kg/m ²
• Seal Coat	- Seal Coat WB Colour	- 0.12kg/m ²
• Clear Seal (optional but advised)	- Seal Coat WB Clear	- 0.08kg/m ²