

ForumSphere: This multi-purpose floor was created for high traffic commercial environments, including offices, retail and public buildings. ForumSphere is highly durable and able to withstand the high traffic and regular maintenance of almost any such space.

APPLICATION TIME: 4 - 5 DAYS (typical)

We require exclusive site access for installation

GUARANTEE: 5 YEARS

With a typical lifespan of over 30 years

THICKNESS: 3-4 MM

Poured in several layers, to a thickness of 3-4mm

SUITABLE FOR MANY USES

- Highly durable build-up
- Easy to clean and maintain
- Long-lasting and hard-wearing
- Designed with regular use in mind
- Almost any colour possible


TYPICAL DATA

| | |
|---------------------|--------------------------------|
| Layers | 3 (min) 5 (typical) |
| Elasticity | 150% |
| Shore Hardness | D50 |
| Abrasion Resistance | Good |
| Fire Classification | B _f s1 - EN 13501-1 |

| | |
|-----------------------------|-------------------|
| Area Use Classification | 33 - EN685 |
| Impact Sound Reduction | 3dB+ |
| Slip Rating | R9-R11 - EN 51130 |
| Resistance to Chair Castors | Good - EN 425 |
| FeRFA Type | Type 5 - BS 8204 |



ForumSphere Typical Section

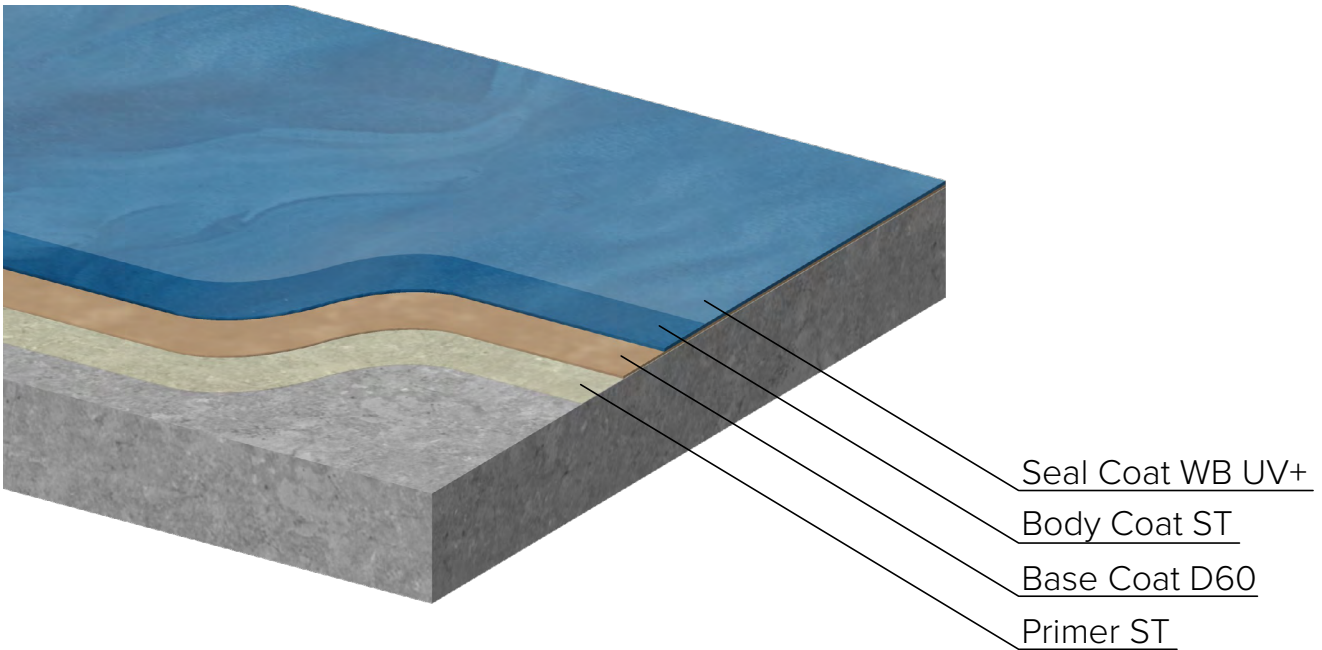

Typical System Build Up ForumSphere

| | | |
|-------------|--------------------------|-------------------------|
| • Primer | - Primer ST | - 1kg/m ² |
| • Base Coat | - Basecoat D60 | - 1kg/m ² |
| • Body Coat | - Body Coat ST | - 2.25kg/m ² |
| • Seal Coat | - Seal Coat WB UV+ Clear | - 0.08kg/m ² |

Other primer options and seal coats variations are possible