

**Superbase Gusto:** Designed to create the look of traditional Italian terrazzo with a simpler installation method. With the option of a fine or medium aggregate size of Carrara and Nero marble as well as Mother of Pearl.

**APPLICATION TIME: 5 DAYS**

Subfloor preparation may add to this time

**GUARANTEE: 6/12 YEARS**

6 years as standard, 12 years with a reinforced base coat

**TYPICAL THICKNESS: 3-4 MM**

**PROPERTIES**

- Decorative mineral filler
- Comfortable underfoot
- Noise reducing
- Easy to maintain
- Solvent free and environmentally friendly
- BREEAM rated
- **System EPD available**


**TYPICAL DATA**

|                     |                    |
|---------------------|--------------------|
| Layers              | 4                  |
| Elasticity          | 135%               |
| Shore Hardness      | D60                |
| Abrasion Resistance | Good               |
| Fire Classification | C <sub>fl</sub> s1 |

|                             |                     |
|-----------------------------|---------------------|
| Area Use Classification     | 23/33 - EN685       |
| Impact Sound Reduction      | 6dB+                |
| Slip Rating                 | R9/R10/R11 EN 51130 |
| Resistance to Chair Castors | Good - EN 425       |
| FerFA Type                  | Type 5 - BS 8204    |



# Superbase Gusto Typical Section

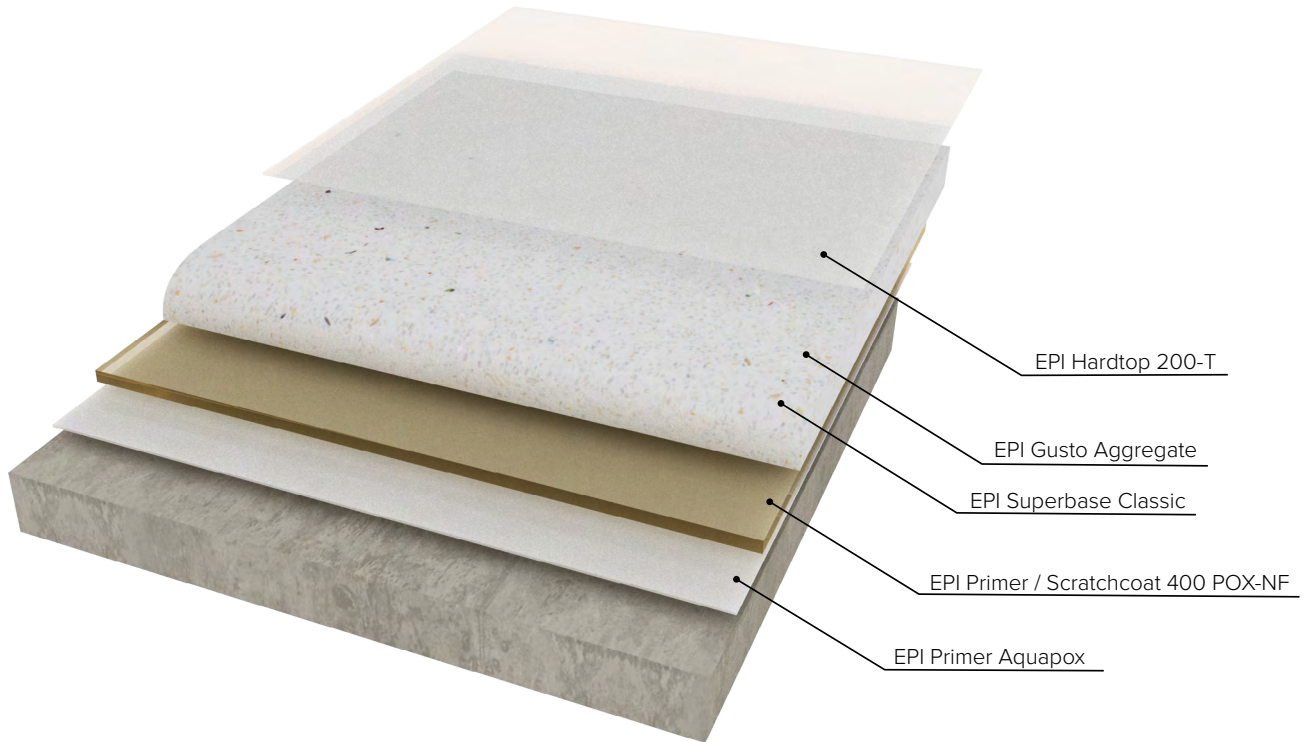

## Typical System Build Up Superbase Gusto

|                              |                                     |                                 |
|------------------------------|-------------------------------------|---------------------------------|
| • <b>Primer</b>              | - EPI Primer Aquapox                | - 0.15 - 0.25 kg/m <sup>2</sup> |
| • <b>Primer/Scratch Coat</b> | - EPI Primer/Scratchcoat 400 POX-NF | - 0.70 - 1.5 kg/m <sup>2</sup>  |
| • <b>Body Coat</b>           | - EPI Superbase Mineral             | - 2.8 - 3.0 kg/m <sup>2</sup>   |
| • <b>Aggregate</b>           | - EPI Gusto Aggregate               | - 1.2 kg/m <sup>2</sup>         |
| • <b>Seal Coat</b>           | - EPI Hardtop 200-T                 | - 0.08 - 0.1 kg/m <sup>2</sup>  |