

HomeSphere: Designed with your home in mind, the HomeSphere system is soft and warm underfoot and perfect for daily life. Suitable for use with or without underfloor heating and durable enough to withstand everyday use.

APPLICATION TIME: 4 - 5 DAYS

Allow 4 working days for a typical project

GUARANTEE: 6 YEARS

Alternatively LuxSphere offers a longer guarantee

THICKNESS: 3-4 MM

Poured in several layers, to a thickness of 4mm

ENVIRONMENTALLY FRIENDLY

- An economical choice for your home
 - Made from natural biopolymers
- No harmful emissions in your home
- Safe for close contact everyday use
 - 100% UV stable
 - Natural plant oil base
- Almost any colour possible


TYPICAL DATA

Layers	4-5
Elasticity	170%
Shore Hardness	D55
Abrasion Resistance	Good
Fire Classification	B _f s1 - EN 13501-1

Area Use Classification	23/33 - EN685
Impact Sound Reduction	4dB+
Slip Rating	R9/R10/R11 - EN 51130
Resistance to Chair Castors	Good - EN 425
FeRFA Type	Type 5 - BS 8204



HomeSphere Typical Section

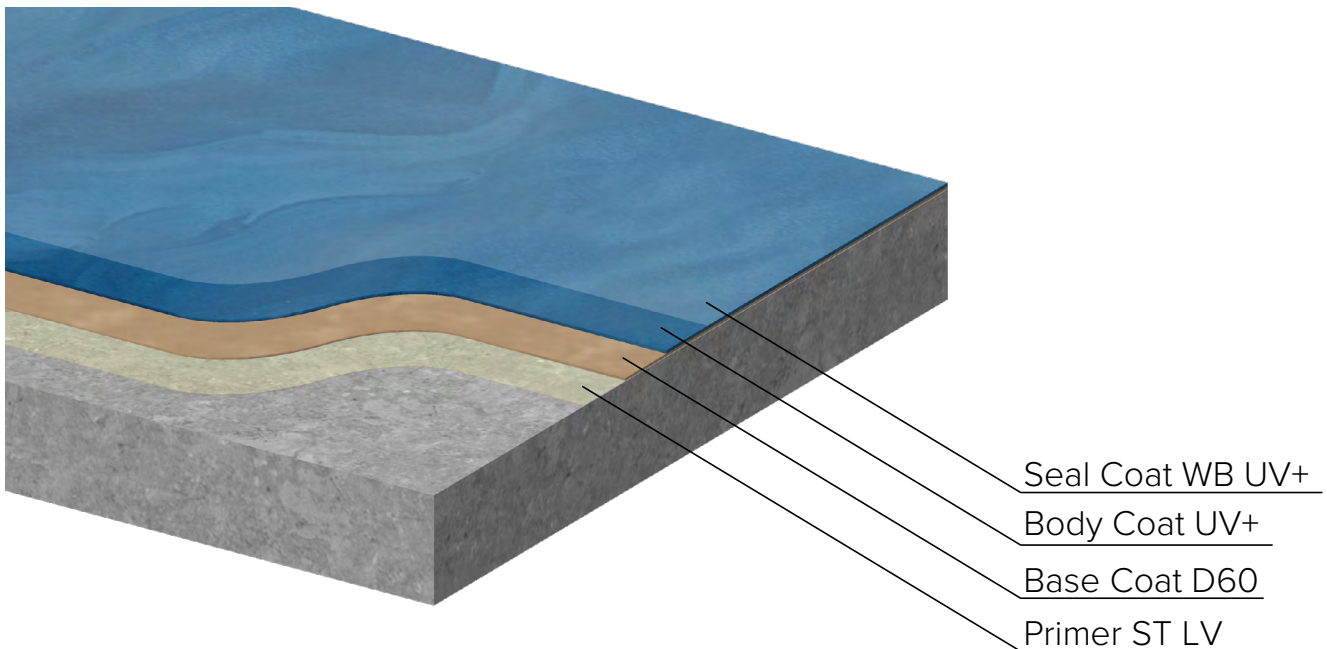

Typical System Build Up HomeSphere

• Primer	- Primer ST/LV/Rapid	- 0.65kg/m ²
• Base Coat	- Basecoat D60	- 1kg/m ²
• Body Coat	- Body Coat UV+	- 2.25kg/m ²
• Seal Coats	- Seal Coat WB UV+ Clear	- 2 x 0.08kg/m ²

Other primer options and seal coats variations are possible