

**HomeSphere:** Designed with your home in mind, the HomeSphere system is soft and warm underfoot and perfect for daily life. Suitable for use with or without underfloor heating and durable enough to withstand everyday use.

**APPLICATION TIME: 3 - 4 DAYS**

Allow 3-4 working days for a typical project

**GUARANTEE: 6 YEARS**

Alternatively LuxSphere offers a longer guarantee

**THICKNESS: 3-4 MM**

Poured in several layers, to a thickness of 4mm

**ENVIRONMENTALLY FRIENDLY**

- An economical choice for your home
- Made from natural biopolymers
- No harmful emissions
- Safe for close contact everyday use
- Natural plant oil base
- Almost any colour possible
- Good acoustic performance


**TYPICAL DATA**

Layers	4-5
Elasticity	140%
Shore Hardness	D60
Abrasion Resistance	Good
Fire Classification	B <sub>f</sub> s1 - EN 13501-1

Area Use Classification	23/33 - EN685
Impact Sound Reduction	-12dB
Slip Rating	R9/R10/R11 - EN 51130
Resistance to Chair Castors	Good - EN 425
FeRFA Type	Type 5 - BS 8204



# HomeSphere Typical Section

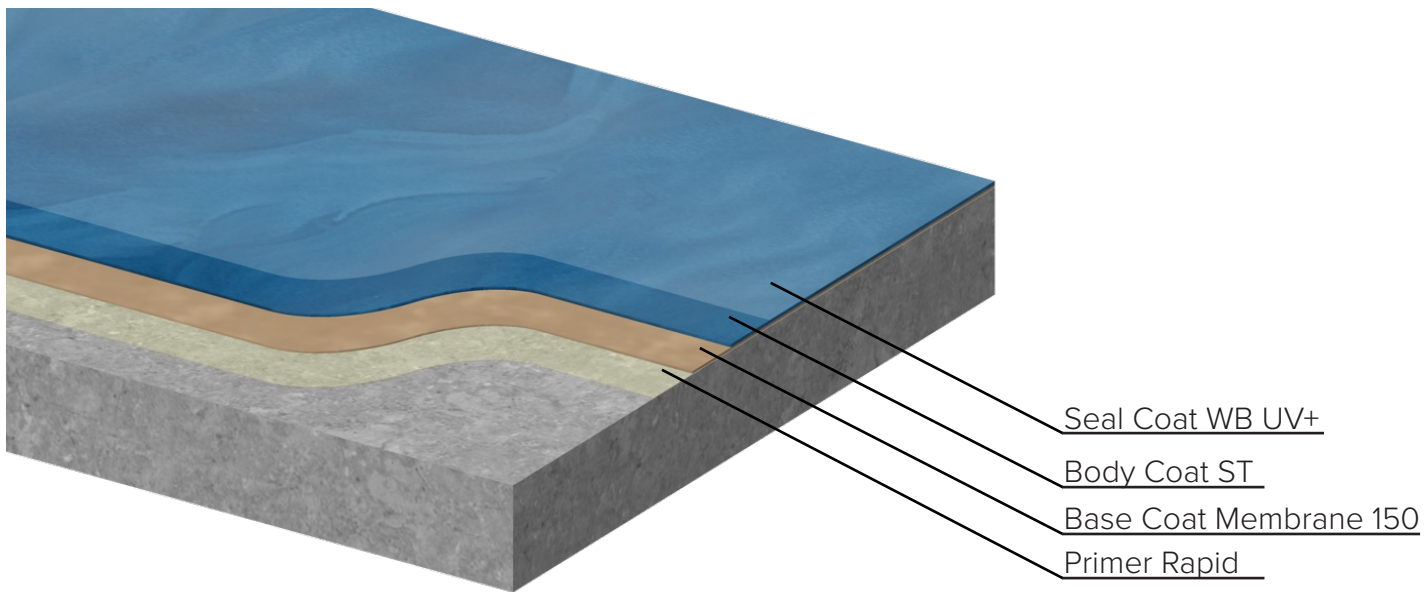

## Typical System Build Up HomeSphere

• <b>Primer</b>	- Primer Rapid	- 0.50kg/m <sup>2</sup>
• <b>Base Coat</b>	- Basecoat Membrane 150	- 1.5kg/m <sup>2</sup>
• <b>Body Coat</b>	- Body Coat ST	- 2.25kg/m <sup>2</sup>
• <b>Seal Coats</b>	- Seal Coat WB UV+ Clear	- 2 x 0.08kg/m <sup>2</sup>

Other primer options and seal coats variations are possible